


light

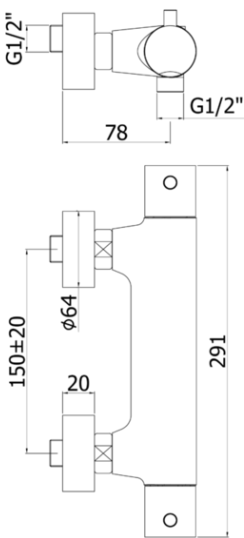

- Thermostatic shower mixer complete with:
 - set of 2 S-wall-unions 1/2"x3/4"G and wall-plates
- Thermostatic shower mixer complete with:
 - set of 2 S-wall-unions 1/2"x3/4"G and wall-plates

LIQ 168..
CR - Chrome | Chrome
LIQ 168D..
CR - Chrome | Chrome

ARTICOLO ARTICLE

- LIQ 168..**
- without shower set
 - with 1/2"G lower connection
 - without shower set
 - with 1/2"G lower connection

- LIQ 168D..**
- with metal joint wall bracket
 - with hand-shower and flexible hose
 - with metal joint wall bracket
 - with hand-shower and flexible hose

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		9.94	14.29	17.53	20.25	22.71	24.78	26.94	28.62	30.51	32.1

DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
LIQ 168



ESPLOSO
RICAMBI
LIQ 168D

